

VIPER Area/Site

VIPER LUMINAIRE

FEATURES

- Low profile LED area/site luminaire with a variety of IES distributions for lighting applications such as auto dealership, retail, commercial, and campus parking lots
- Featuring three different optical technologies, Strike, Micro Strike and Silicone Strike Optics, which provide the best distribution patterns for retrofit or new construction
- Rated for high vibration applications including bridges and overpasses. All sizes are rated for 1.5G
- Control options including photo control, occupancy sensing, NX Lighting Controls™, LightGRID+ and 7-Pin with networked controls
- New customizable lumen output feature allows for the wattage and lumen output to be customized in the factory to meet whatever specification requirements may entail
- Field interchangeable mounting provides additional flexibility after the fixture has shipped



CONTROL TECHNOLOGY



SERVICE PROGRAMS



SPECIFICATIONS

CONSTRUCTION

- Die-cast housing with hidden vertical heat fins are optimal for heat dissipation while keeping a clean smooth outer surface
- Corrosion resistant, die-cast aluminum housing with 1000 hour powder coat paint finish
- External hardware is corrosion resistant

OPTICS

- Micro Strike Optics (160, 320, 480, or 720 LED counts) maximize uniformity in applications and come standard with mid-power LEDs which evenly illuminate the entire luminous surface area to provide a low glare appearance. Catalog logic found on page 2
- Strike Optics (36, 72, 108, or 162 LED counts) provide best in class distributions and maximum pole spacing in new applications with high powered LEDs. Strike optics are held in place with a polycarbonate bezel to mimic the appearance of the Micro Strike Optics so both solutions can be combined on the same application. Catalog logic found on page 3
- Silicone Strike Optics (40, 80, 120, or 180 LED counts) maximize uniformity in applications and provides the highest LPW. These include an integral gasket allowing for IP66 rating. Catalog logic found on page 4.
- All optics maximize target zone illumination with minimal losses at the house-side, reducing light trespass issues. Additional backlight control shields and house side shields can be added for further reduction of illumination behind the pole
- One-piece silicone gasket ensures a weatherproof seal
- Zero up-light at 0 degrees of tilt
- Field rotatable optics

INSTALLATION

- Mounting patterns for each arm can be found on page 11
- Optional universal mounting block for ease of installation during retrofit applications. Available as an option (ASQU) or accessory for square and round poles
- All mounting hardware included

INSTALLATION (CONTINUED)

- Knuckle arm fitter option available for 2-3/8" OD tenon
- For products with EPA less than 1 mounted to a pole greater than 20ft, a vibration damper is recommended


ELECTRICAL

- Universal 120-277 VAC or 347-480 VAC input voltage, 50/60 Hz
- Ambient operating temperature -40°C to 40°C
- Drivers have greater than 90% power factor and less than 20% THD
- LED drivers have output power over-voltage, over-current protection and short circuit protection with auto recovery
- Field replaceable surge protection device provides 20kA protection meeting ANSI/ IEEE C62.41.2 Category C High and Surge Location Category C3; Automatically takes fixture off-line for protection when device is compromised
- Dual Driver option provides 2 drivers within luminaire but only one set of leads exiting the luminaire, where Dual Power Feed provides two drivers which can be wired independently as two sets of leads are extended from the luminaire. Both options cannot be combined

CONTROLS

- Photo control, occupancy sensor programmable controls, and Zigbee wireless controls available for complete on/off and dimming control
- Please consult brand or sales representative when combining control and electrical options as some combinations may not operate as anticipated depending on your application
- 7-pin ANSI C136.41-2013 photocontrol receptacle option available for twist lock photocontrols or wireless control modules (control accessories sold separately)
- 0-10V Dimming Drivers are standard. Select CD option to have dimming leads extended outside the luminaire. Must specify if wiring leads are to be greater than the 6" standard.

SILICONE STRIKE | OPTICS STRIKE

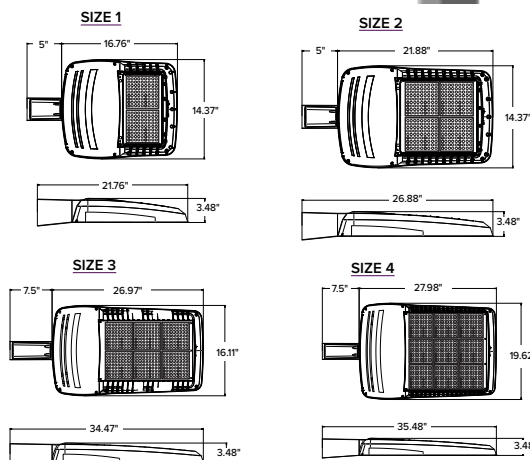

	EPA				Config.
	VP1 (Size 1)	VP2 (Size 2)	VP3 (Size 3)	VP4 (Size 4)	
Single Fixture	0.454	0.555	0.655	0.698	
Two at 180	0.908	1.110	1.310	1.396	
Two at 90	0.583	0.711	0.857	0.948	
Three at 90	1.037	1.266	1.512	1.646	
Three at 120	0.943	1.155	1.392	1.680	
Four at 90	1.166	1.422	1.714	1.896	

CONTROLS (CONTINUED)

- NX Lighting Controls™ available with in fixture wireless control module, features dimming and occupancy sensor
- LightGRID+ available with in fixture wireless control module, features dimming and occupancy sensor. Also available in 7-pin configuration

CERTIFICATIONS

- DLC® (DesignLights Consortium Qualified), with some Premium Qualified configurations. Not all product variations listed in this document are DLC® qualified. Refer to <http://www.designlights.org> for the most up-to-date list.
- Listed to UL1598 and CSA C22.2#250.0-24 for wet locations and 40°C ambient temperatures
- 1.5 G rated for ANSI C136.31 high vibration applications
- Fixture is IP65 rated with Strike and Microstrike optics. Fixture is IP66 rated with Silicone Strike optics.
- Meets IDA recommendations using 3K CCT configuration at 0 degrees of tilt
- This product meets federal procurement law requirements under the Buy American Act (FAR 52.225-9) and Trade Agreements Act (FAR 52.225-11). See Buy America(n) Solutions (link to <https://www.currentlighting.com/resources/america-solutions>).
- FCC CFR Title 47 Part 15, Class A

WARRANTY

- 5 year warranty

VIPER Area/Site

VIPER LUMINAIRE

MICROSTRIKE OPTICS – ORDERING GUIDE

Gray Shading = Service Program Limit of 15 luminaires

QS10

Example: VP-2-320L-145-3K7-2-R-UNV-A3-BLT

CATALOG #

VP							
Series	Optic Platform	Size	Light Engine	CCT/CRI	Distribution	Optic Rotation	Voltage
VP Viper	Micro Strike	1 Size 1	160L-35 ⁶ 5500 lumens 160L-50 ⁶ 7500 lumens 160L-75 10000 lumens 160L-100 12500 lumens 160L-115 15000 lumens 160L-135 18000 lumens 160L-160 21000 lumens 320L-145 21000 lumens 320L-170 24000 lumens 320L-185 27000 lumens 320L-210 30000 lumens 320L-235 33000 lumens 320L-255 36000 lumens 320L-315 ⁶ 40000 lumens 480L-285 40000 lumens 480L-320 44000 lumens 480L-340 48000 lumens 480L-390 52000 lumens 480L-425 55000 lumens 480L-470 60000 lumens 720L-435 60000 lumens 720L-475 65000 lumens 720L-515 70000 lumens 720L-565 ⁶ 75000 lumens 720L-600 ⁶ 80000 lumens CLO Custom Lumen Output ¹	AP AP-Amber Phosphor Converted 27K8 2700K, 80 CRI 3K7 3000K, 70 CRI 3K8 3000K, 80 CRI 35K8 3500K, 80 CRI 3K9 3000K, 90 CRI 4K7 4000K, 70 CRI 4K8 4000K, 80 CRI 4K9 4000K, 90 CRI 5K7 5000K, 70 CRI 5K8 5000K, 80 CRI	2 Type 2 3 Type 3 4F Type 4 Forward 4W Type 4 Wide 5QW Type 5 Square Wide	BLANK No Rotation L Optic rotation left R Optic rotation right	UNV 120-277V 120 120V 208 208V 240 240V 277 277V 347 347V 480 480V
		2 Size 2					
		3 Size 3					
		4 Size 4					

Mounting	Color	Options	Network Control Options
A Arm mount for square pole/flat surface (B3 Drill Pattern) (Does not include round pole adapter) A_ Arm mount for round pole ² ASQU Universal arm mount for square pole. Can be used with B3 or S2 Drill Pattern A_U Universal arm mount for round pole ² AAU Adjustable arm for pole mounting (universal drill pattern) AA_U Adjustable arm mount for round pole ² ADU Decorative upswept Arm (universal drill pattern) AD_U Decorative upswept arm mount for round pole ² MAF Mast arm fitter for 2-3/8" OD horizontal arm K Knuckle T Trunnion WB Wall Bracket, horizontal tenon with MAF WM Wall mount bracket with decorative upswept arm WA Wall mount bracket with adjustable arm	BLT Black Matte Textured BLS Black Gloss Smooth DBT Dark Bronze Matte Textured DBS Dark Bronze Gloss Smooth GTT Graphite Matte Textured LGS Light Grey Gloss Smooth LGT Light Grey Gloss Textured PSS Platinum Silver Smooth WHT White Matte Textured WHS White Gloss Smooth VGT Verde Green Textured Color Option CC Custom Color	F Fusing 2PF Dual Power Feed ⁸ 2DR Dual Driver ⁸ TE Tooless Entry BC Backlight Control TB Terminal Block CD Customer Dimming	NXWS16F NX Networked Wireless Enabled Integral NXSMP2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming ^{13,4} NXWS40F NX Networked Wireless Enabled Integral NXSMP2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming ^{13,4} NXW NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor ^{3,4} WIR LightGRID+ In-Fixture Module ^{3,4} WIRSC LightGRID+ Module and Occupancy Sensor ^{3,4} Stand Alone Sensors BTS-14F Bluetooth® Programmable, BTSMP-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens BTS-40F Bluetooth® Programmable, BTSMP-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens BTSO-12F Bluetooth® Programmable, BTSMP-OMNI-O PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens 7PR 7-Pin Receptacle ⁴ 7PR-SC 7-Pin Receptacle with shorting cap ⁴ 7PR-TL 7-Pin PCR with photocontrol 3PR 3-Pin twist lock ⁴ 3PR-SC 3-Pin receptacle with shorting cap ⁴ 3PR-TL 3-Pin PCR with photocontrol ⁴ Programmed Controls SCP_F Sensor Control Programmable, 8F or 40F ⁹ ADD AutoDim Timer Based Dimming ¹⁰ ADT AutoDim Time of Day Dimming ¹⁰

1 – Items with a grey background can be done as a custom order. Contact brand representative for more information

2 – Replace “_” with “3” for 3.5”-4.13” OD pole, “4” for 4.18”-5.25” OD pole, “5” for 5.5”-6.5” OD pole

3 – Networked Controls cannot be combined with other control options

4 – Not available with 2PF option

5 – Not available with Dual Driver option

6 – Some voltage restrictions may apply when combined with controls

7 – Not available with 480V

8 – 2PF and 2DR available in 50W or higher only

9 – At least one SCPREMOTE required to program SCP motion sensor. Must select 8ft or 40ft.

10 – Please refer to page 10 for AutoDim ordering guide



VIPER Area/Site

VIPER LUMINAIRE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

STRIKE OPTIC – ORDERING GUIDE

Example: VP-ST-1-36L-39-3K7-2-UNV-A-BLT

CATALOG #

VP							
Series	Optic Platform	Size	Light Engine	CCT/CRI	Distribution	Optic Rotation	Voltage
VP Viper	ST Strike	1 Size 1	36L-39 ⁸ 5500 lumens 36L-55 ⁸ 7500 lumens 36L-85 10000 lumens 36L-105 12500 lumens 36L-120 14000 lumens	AM monochromatic amber, 595nm	FR Auto Front Row	BLANK No Rotation	UNV 120-277V
		2 Size 2	72L-115 15000 lumens 72L-145 18000 lumens 72L-180 21000 lumens 72L-210 24000 lumens 72L-240 27000 lumens	27K8 2700K, 80 CRI 3K7 3000K, 70 CRI 3K8 3000K, 80 CRI 3K9 3000K, 90 CRI 35K8 3500K, 80 CRI 4K7 4000K, 70 CRI 4K8 4000K, 80 CRI 4K9 4000K, 90 CRI	2 Type 2 3 Type 3 4F Type 4 Forward 4W Type 4 Wide 5QN Type 5 Square Narrow 5QW Type 5 Square Wide 5QM Type 5 Square Medium 5W Type 5 Wide (Round) 5RW Type 5 Rectangular C Corner Optic TC Tennis Court Optic	L Optic rotation left R Optic rotation right	120 120V 208 208V 240 240V 277 277V 347 347V 480 480V
		3 Size 3	108L-215 ⁸ 27000 lumens 108L-250 30000 lumens 108L-280 33000 lumens 108L-325 36000 lumens 108L-365 40000 lumens	5K7 5000K, 70 CRI 5K8 5000K, 80 CRI			
		4 Size 4	162L-320 40000 lumens 162L-365 ¹⁰ 44000 lumens 162L-405 48000 lumens 162L-445 52000 lumens 162L-485 55000 lumens 162L-545 ⁸ 60000 lumens CLO Custom Lumen Output ¹				

Mounting	Color	Options	Network Control Options
A Arm mount for square pole/flat surface A_ Arm mount for round pole ³ ASQU Universal arm mount for square pole A_U Universal arm mount for round pole ³ AAU Adjustable arm for pole mounting (universal drill pattern) AA_U Adjustable arm mount for round pole ³ ADU Decorative upswept Arm (universal drill pattern) AD_U Decorative upswept arm mount for round pole ³ MAF Mast arm fitter for 2-3/8" OD horizontal arm K Knuckle T Trunnion WB Wall Bracket, horizontal tenon with MAF WM Wall mount bracket with decorative upswept arm WA Wall mount bracket with adjustable arm	BLT Black Matte Textured BLS Black Gloss Smooth DBT Dark Bronze Matte Textured DBS Dark Bronze Gloss Smooth GTT Graphite Matte Textured LGS Light Grey Gloss Smooth LGT Light Grey Gloss Textured PSS Platinum Silver Smooth WHT White Matte Textured WHS White Gloss Smooth VGT Verde Green Textured Color Option CC Custom Color	F Fusing E Battery Backup ^{1,2,7,8,9} 2PF Dual Power Feed ¹³ 2DR Dual Driver ¹³ TE Tooless Entry BC Backlight Control TB Terminal Block CD Customer Dimming	NXWS16F NX Networked Wireless Enabled Integral NXSMP2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming ^{1,4,5} NXWS40F NX Networked Wireless Enabled Integral NXSMP2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming ^{1,4,5} NXW NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor ^{4,5} WIR LightGRID+ In-Fixture Module ^{4,5} WIRSC LightGRID+ Module and Occupancy Sensor ^{4,5} Stand Alone Sensors BTS-14F Bluetooth® Programmable, BTSMP-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens BTS-40F Bluetooth® Programmable, BTSMP-HMO PIR Occupancy Sensor with Automatic Dimming® Photocell and 360° Lens BTSO-12F Bluetooth® Programmable, BTSMP-OMNI-O PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens 7PR 7-Pin Receptacle ⁴ 7PR-SC 7-Pin Receptacle with shorting cap ⁴ 7PR-TL 7-Pin PCR with photocontrol 3PR 3-Pin twist lock ⁴ 3PR-SC 3-Pin receptacle with shorting cap ⁴ 3PR-TL 3-Pin PCR with photocontrol ⁴ Programmed Controls SCP-_F Sensor Control Programmable, 8F or 40F ¹¹ ADD AutoDim Timer Based Dimming ¹² ADT AutoDim Time of Day Dimming ¹²

1 – Items with a grey background can be done as a custom order. Contact brand representative for more information

2 – Battery temperature rating -20C to 55C

3 – Replace “_” with “3” for 3.5”-4.13” OD pole, “4” for 4.18”-5.25” OD pole, “5” for 5.5”-6.5” OD pole

4 – Networked Controls cannot be combined with other control options

5 – Not available with 2PF option

6 – Not available with 480V

7 – Not available with 347 or 480V

8 – Not available with Dual Driver option

9 – Only available in Size 1 housing, up to 105 Watts

10 – Some voltage restrictions may apply when combined with controls

11 – At least one SCPREMOTE required to program SCP motion sensor. Must select 8ft or 40ft.

12 – Please refer to page 10 for AutoDim ordering guide

13 – 2DR and 2PF available in 55W or higher only



currentlighting.com/beacon

© 2025 Current Lighting Solutions, LLC. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

VIPER Area/Site

VIPER LUMINAIRE

SILICONE STRIKE OPTIC – ORDERING GUIDE

Example: VP-SS-1-40L-75-4K7-4W-UNV-ASQU-BLT

CATALOG #								
VP								
Series	Optic Platform	Size	Light Engine		CCT/CRI	Distribution		Optic Rotation
VP Viper	SS Strike Silicone	1 Size 1	40L-35	35W, 5,500 Lumens	22K7	2200K, 70 CRI	2 Type 2	BLANK No Rotation
			40L-55	55W, 7,500 Lumens	27K7	2700K, 70 CRI	3 Type 3	L Optic rotation left
			40L-65	65W, 10,000 Lumens	27K8	2700K, 80 CRI	4W Type 4 Wide	R Optic rotation right
			40L-80	80W, 12,500 Lumens	3K7	3000K, 70 CRI	4F Type 4 Forward	
			40L-100	100W, 15,000 Lumens	3K8	3000K, 80 CRI	5QM Type 5 Square Medium	
			40L-120	120W, 17,500 Lumens	35K8	3500K, 80 CRI	5QW Type 5 Square Wide	
			40L-140	140W, 20,000 Lumens	4K7	4000K, 70 CRI		
			40L-170	170W, 22,500 Lumens	4K8	4000K, 80 CRI		
			40L-195	195W, 25,000 Lumens	5K7	5000K, 70 CRI		
		2 Size 2	80L-75	75W, 12,500 Lumens	5K8	5000K, 80 CRI		
			80L-90	90W, 15,000 Lumens				
			80L-105	105W, 17,500 Lumens				
			80L-130	130W, 21,000 Lumens				
			80L-155	155W, 24,000 Lumens				
			80L-175	175W, 27,000 Lumens				
			80L-205	205W, 30,000 Lumens				
			80L-225	225W, 33,000 Lumens				
			80L-250	250W, 36,000 Lumens				
			80L-280	280W, 40,000 Lumens				
		3 Size 3	120L-190	190W, 30,000 Lumens				
			120L-205	205W, 33,000 Lumens				
			120L-230	230W, 36,000 Lumens				
			120L-265	265W, 40,000 Lumens				
			120L-295	295W, 44,000 Lumens				
			120L-320	320W, 48,000 Lumens				
			120L-355	355W, 52,000 Lumens				
			120L-380	380W, 55,000 Lumens				
			120L-420	420W, 60,000 Lumens				
		4 Size 4	180L-275	275W, 44,000 Lumens				
			180L-295	295W, 48,000 Lumens				
			180L-335	335W, 52,000 Lumens				
			180L-360	360W, 55,000 Lumens				
			180L-395	395W, 60,000 Lumens				
			180L-435	435W, 65,000 Lumens				
			180L-470	470W, 70,000 Lumens				
			180L-510	510W, 75,000 Lumens				
			180L-550	550W, 80,000 Lumens				

VIPER Area/Site

VIPER LUMINAIRE

SILICONE STRIKE OPTIC – ORDERING GUIDE (CONTINUED)

Mounting	Color	Options	Network Control Options
A Arm mount for square pole/flat surface	BLT Black Matte Textured	BC Backlight Control (3%)	NXWS16F NX Networked Wireless Enabled Integral NXSMP2-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming ^{1,4,5}
A_ Arm mount for round pole ³	BLS Black Gloss Smooth	MBC Max Backlight Control (1.5%)	NXWS40F NX Networked Wireless Enabled Integral NXSMP2-HMO PIR Occupancy Sensor with Automatic Dimming Photocell and Bluetooth Programming ^{1,4,5}
ASQU Universal arm mount for square pole	DBT Dark Bronze Matte Textured	LCC Left Corner Control	NXW NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor ^{4,5}
A_U Universal arm mount for round pole ³	DBS Dark Bronze Gloss Smooth	RCC Right Corner Control	WIR LightGRID+ In-Fixture Module ^{4,5}
AAU Adjustable arm for pole mounting (universal drill pattern)	GTT Graphite Matte Textured	F Fusing	WIRSC LightGRID+ Module and Occupancy Sensor ^{4,5}
AA_U Adjustable arm mount for round pole ³	LGS Light Grey Gloss Smooth	E Battery Backup ^{1,2,7,8,9}	Stand Alone Sensors
ADU Decorative upswept Arm (universal drill pattern)	LGT Light Grey Gloss Textured	2PF Dual Power Feed ¹³	BTS-14F Bluetooth® Programmable, BTSMP-LMO PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens
AD_U Decorative upswept arm mount for round pole ³	PSS Platinum Silver Smooth	2DR Dual Driver ¹³	BTS-40F Bluetooth® Programmable, BTSMP-HMO PIR Occupancy Sensor with Automatic Dimming® Photocell and 360° Lens
MAF Mast arm fitter for 2-3/8" OD horizontal arm	WHT White Matte Textured	TE Toolless Entry	BTSO-12F Bluetooth® Programmable, BTSMP-OMNI-O PIR Occupancy Sensor with Automatic Dimming Photocell and 360° Lens
K Knuckle	WHS White Gloss Smooth	TB Terminal Block	7PR 7-Pin Receptacle ⁴
T Trunnion	VG Verde Green Textured	CD Customer Dimming	7PR-SC 7-Pin Receptacle with shorting cap ⁴
WB Wall Bracket, horizontal tenon with MAF			7PR-TL 7-Pin PCR with photocontrol
WM Wall mount bracket with decorative upswept arm			3PR 3-Pin twist lock ⁴
WA Wall mount bracket with adjustable arm			3PR-SC 3-Pin receptacle with shorting cap ⁴
	Color Option		3PR-TL 3-Pin PCR with photocontrol ⁴
	CC Custom Color		Programmed Controls
			SCP_F Sensor Control Programmable, 8F or 40F ¹¹
			ADD AutoDim Timer Based Dimming ¹²
			ADT AutoDim Time of Day Dimming ¹²

¹ – Items with a grey background can be done as a custom order. Contact brand representative for more information.

² – Battery temperature rating -20C to 55C

³ – Replace “_” with “3” for 3.5”-4.13” OD pole, “4” for 4.18”-5.25” OD pole, “5” for 5.5”-6.5” OD pole

⁴ – Networked Controls cannot be combined with other control options

⁵ – Not available with 2PF option

⁶ – Not available with 480V

⁷ – Not available with 347 or 480V

⁸ – Not available with Dual Driver option

⁹ – Only available in Size 1 housing, up to 105 Watts

¹⁰ – Some voltage restrictions may apply when combined with controls

¹¹ – At least one SCPREMOTE required to program SCP motion sensor. Must select 8ft or 40ft.

¹² - Please refer to page 10 for AutoDim ordering guide

¹³ – 2DR and 2PF available in 55W or higher only



DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

CATALOG #	DESCRIPTION	UNIT PRICE	QUANTITY	TOTAL
1	1000	1000	1000	1000
2	1000	1000	1000	1000
3	1000	1000	1000	1000
4	1000	1000	1000	1000
5	1000	1000	1000	1000
6	1000	1000	1000	1000
7	1000	1000	1000	1000
8	1000	1000	1000	1000
9	1000	1000	1000	1000
10	1000	1000	1000	1000
11	1000	1000	1000	1000
12	1000	1000	1000	1000
13	1000	1000	1000	1000
14	1000	1000	1000	1000
15	1000	1000	1000	1000
16	1000	1000	1000	1000
17	1000	1000	1000	1000
18	1000	1000	1000	1000
19	1000	1000	1000	1000
20	1000	1000	1000	1000
21	1000	1000	1000	1000
22	1000	1000	1000	1000
23	1000	1000	1000	1000
24	1000	1000	1000	1000
25	1000	1000	1000	1000
26	1000	1000	1000	1000
27	1000	1000	1000	1000
28	1000	1000	1000	1000
29	1000	1000	1000	1000
30	1000	1000	1000	1000
31	1000	1000	1000	1000
32	1000	1000	1000	1000
33	1000	1000	1000	1000
34	1000	1000	1000	1000
35	1000	1000	1000	1000
36	1000	1000	1000	1000
37	1000	1000	1000	1000
38	1000	1000	1000	1000
39	1000	1000	1000	1000
40	1000	1000	1000	1000
41	1000	1000	1000	1000
42	1000	1000	1000	1000
43	1000	1000	1000	1000
44	1000	1000	1000	1000
45	1000	1000	1000	1000
46	1000	1000	1000	1000
47	1000	1000	1000	1000
48	1000	1000	1000	1000
49	1000	1000	1000	1000
50	1000	1000	1000	1000
51	1000	1000	1000	1000
52	1000	1000	1000	1000
53	1000	1000	1000	1000
54	1000	1000	1000	1000
55	1000	1000	1000	1000
56	1000	1000	1000	1000
57	1000	1000	1000	1000
58	1000	1000	1000	1000
59	1000	1000	1000	1000
60	1000	1000	1000	1000
61	1000	1000	1000	1000
62	1000	1000	1000	1000
63	1000	1000	1000	1000
64	1000	1000	1000	1000
65	1000	1000	1000	1000
66	1000	1000	1000	1000
67	1000	1000	1000	1000
68	1000	1000	1000	1000
69	1000	1000	1000	1000
70	1000	1000	1000	1000
71	1000	1000	1000	1000
72	1000	1000	1000	1000
73	1000	1000	1000	1000
74	1000	1000		

Accessory Type		Size	Option	Color	
SHD	Shield	1	Size 1	BLS	Black Gloss Smooth
		2	Size 2	BLT	Black Matte Textured
		3	Size 3	DBS	Dark Bronze Gloss Smooth
		4	Size 4	DBT	Dark Bronze Matte Textured
				GTT	Graphite Matte Textured
				LGS	Light Gray Gloss Smooth
				PSS	Platinum Silver Smooth
				WHS	White Gloss Smooth
				WHT	White Matte Textured
				VGT	Green Landscape Decorative
MTG	Mounting			LEG	Legacy Colors
				Color Option	
				CC	Custom Color


Accessory Type		Option	
MSC	Miscellaneous	BIRD SPK	Bird Spike

Current Control Solutions — Accessories (Sold Separately)		
NX Lighting Controls		
☐	NXOFM2-1R1D-UNV	On-fixture Module (7-pin), On / Off / Dim, Daylight Sensor with NX Radio and Bluetooth® Radio, 120—480VAC
LightGRID+ Lighting Control		
☐	WIR-RME-L	On-fixture Module (7-pin or 5-pin), On / Off / Dim, Daylight Sensor with LightGRID+ Radio, 110—480VAC
☐	SCP-REMOTE	Remote Control for SCP/_F option. Order at least one per project to program and control the occupancy sensor
For additional information related to these accessories please visit currentlighting.com/beacon . Options provided for use with integrated sensor, please view specification sheet ordering information table for details.		

VIPER Area/Site

VIPER LUMINAIRE

VIPER POLE EXPRESS COMBO – ORDERING GUIDE

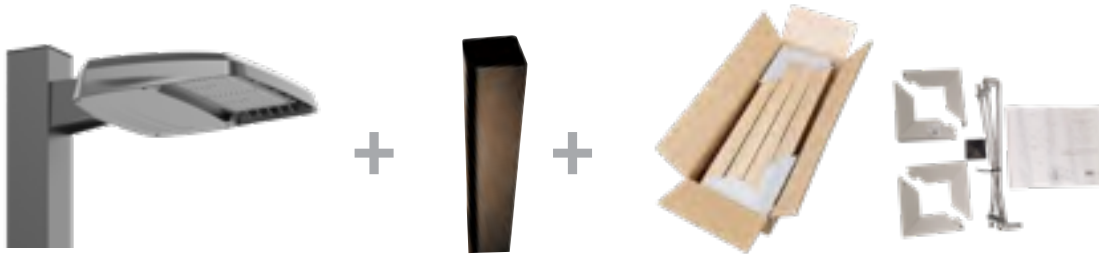

Catalog Number	Pole	Single or Double Head	Fixture	Lumens*	Wattage	Distribution	CCT/CRI	Mounting	Finish
VP-1-160-4K-3-LS-S20	20' Square Straight Steel	Single	VP-1-160-4K-3-LS	19584	158W	Type 3	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-3-LS-S20-2X	20' Square Straight Steel	Double	VP-1-160-4K-3-LS	19584	158W	Type 3	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-4F-LS-S20	20' Square Straight Steel	Single	VP-1-160-4K-4F-LS	19426	158W	Type 4F	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-4F-LS-S20-2X	20' Square Straight Steel	Double	VP-1-160-4K-4F-LS	19426	158W	Type 4F	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-3-LS-S25	25' Square Straight Steel	Single	VP-1-160-4K-3-LS	19584	158W	Type 3	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-3-LS-S25-2X	25' Square Straight Steel	Double	VP-1-160-4K-3-LS	19584	158W	Type 3	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-4F-LS-S25	25' Square Straight Steel	Single	VP-1-160-4K-4F-LS	19426	158W	Type 4F	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-4K-4F-LS-S25-2X	25' Square Straight Steel	Double	VP-1-160-4K-4F-LS	19426	158W	Type 4F	4000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-3-LS-S20	20' Square Straight Steel	Single	VP-1-160-5K-3-LS	19499	158W	Type 3	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-3-LS-S20-2X	20' Square Straight Steel	Double	VP-1-160-5K-3-LS	19499	158W	Type 3	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-4F-LS-S20	20' Square Straight Steel	Single	VP-1-160-5K-4F-LS	19186	158W	Type 4F	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-4F-LS-S20-2X	20' Square Straight Steel	Double	VP-1-160-5K-4F-LS	19186	158W	Type 4F	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-3-LS-S25	25' Square Straight Steel	Single	VP-1-160-5K-3-LS	19499	158W	Type 3	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-3-LS-S25-2X	25' Square Straight Steel	Double	VP-1-160-5K-3-LS	19499	158W	Type 3	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-4F-LS-S25	25' Square Straight Steel	Single	VP-1-160-5K-4F-LS	19186	158W	Type 4F	5000K/70CRI	Universal Arm	Dark Bronze Textured
VP-1-160-5K-4F-LS-S25-2X	25' Square Straight Steel	Double	VP-1-160-5K-4F-LS	19186	158W	Type 4F	5000K/70CRI	Universal Arm	Dark Bronze Textured

VIPER POLE EXPRESS COMBO – STOCK LUMINAIRE SKUS

Catalog Number	Lumens	LPW	Distribution	Wattage	CCT/CRI	Voltage	Mounting	Finish
VP-1-160-4K-3-LS	19584	123.9	3	158W	4000K/70CRI	120-277V	Universal Arm with RPA (A3U)	Dark Bronze Textured
VP-1-160-4K-4F-LS	19426	122.9	4F	158W	4000K/70CRI	120-277V	Universal Arm with RPA (A3U)	Dark Bronze Textured
VP-1-160-5K-3-LS	19499	123.4	3	158W	5000K/70CRI	120-277V	Universal Arm with RPA (A3U)	Dark Bronze Textured
VP-1-160-5K-4F-LS	19186	121.4	4F	158W	5000K/70CRI	120-277V	Universal Arm with RPA (A3U)	Dark Bronze Textured

VIPER POLE EXPRESS COMBO – ACCESSORIES

Catalog Number	Description
VM14DB	Vibration Dampener, mounts to top of pole for reduced vibration



VIPER Area/Site

VIPER LUMINAIRE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

OUTDOOR LIGHTING CONTROLS OPTIONS CONTROLS FUNCTIONALITY LIGHTGRID+ NX


Control Option Ordering Logic & Description		Control Option Functionality									Control Option Components
		Networkable	Grouping	Scheduling	Occupancy/Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming	Sensor Height	
NX Wireless	NXOFM2-1R1D-UNV	✓	✓	✓	Paired with external control	✓	✓	✓	✓	-	 NXOFM-1R1D-UV
	NXW	✓	✓	✓	-	-	✓	✓	✓	-	 NXRM2-H
	NXWS12F	✓	✓	✓	✓	✓	✓	✓	✓	12ft	 NXSMP2-OMNI-O
	NXWS16F	✓	✓	✓	✓	✓	✓	✓	✓	16ft	 NXSMP2-LMO
	NXWS40F	✓	✓	✓	✓	✓	✓	✓	✓	40ft	 NXSMP2-HMO
LightGRID+	WIR	✓	-	✓	-	-	✓	✓	Gateway	-	 WIR
	WIR-RME-L	✓	-	✓	-	-	✓	✓	Gateway	-	 WIR-RME-L
	WIRSC	✓	✓	✓	✓	✓	✓	✓	Gateway	14ft - 40ft	 BTMSP
Independent	BTSO-12F	-	-	-	✓	✓	✓	✓	✓	12ft	 BTSMP-OMNI-O
	BTS-14F	-	-	-	✓	✓	✓	✓	✓	14ft	 BTSMP-LMO
	BTS-40F	-	-	-	✓	✓	✓	✓	✓	40ft	 BTSMP-HMO

DEFAULT SETTINGS

NX Wireless	Occupancy Sensor	Enabled
	Occupancy Sensor Sensitivity	7
	Occupancy Sensor Timeout	15 Minutes
	Occupied Dim Level	100%
	Unoccupied Dim Level	0%
	Daylight Sensor	Disabled
	Bluetooth	Enabled
	2.4GHz Wireless Mesh	On
	Passcode Factory Passcode: HubbN3T!	Enabled

Stand Alone	Occupancy Sensor	Enabled
	Occupancy Sensor Sensitivity	7
	Occupancy Sensor Timeout	8 Minutes
	Occupied Dim Level	100%
	Unoccupied Dim Level	50%
	Daylight Sensor	Disabled

NX WIRELESS COVERAGE PATTERNS

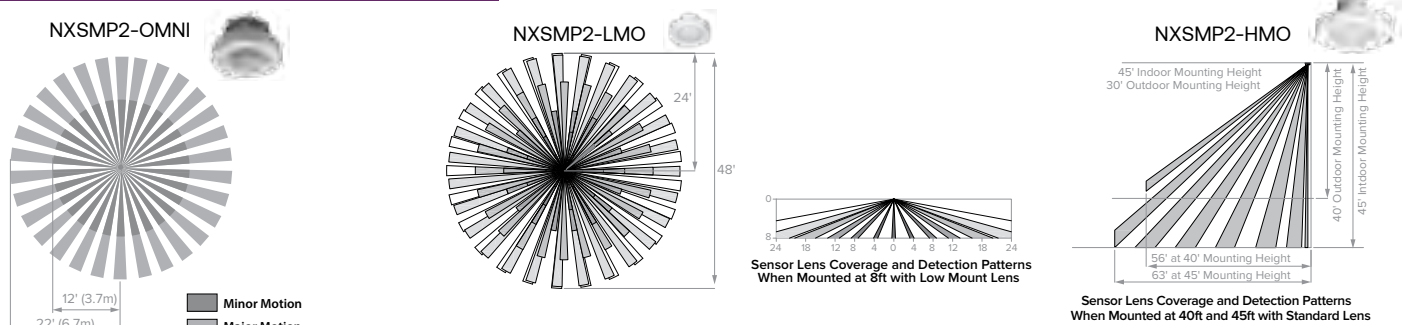

VIPER Area/Site

VIPER LUMINAIRE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

NX LIGHTING CONTROLS FREE APP

CONTROLS TECH SUPPORT 800-888-8006 (7:00 AM - 7:00 PM)



The NX Lighting Controls App is free to use mobile application for programming both NX Lighting Controls System or Standalone Bluetooth Sensors. The mobile app allows you to configure devices, discover and setup wireless enable luminaires and program NX system settings.

Apple App: <https://apps.apple.com/us/app/nx-lighting-controls/id962112904>

Google Play: https://play.google.com/store/apps/details?id=io.cordova.NXBTR&hl=en_US&q=US



Apple App




Google Play

OUTDOOR LIGHTING CONTROLS OPTIONS

CONTROLS FUNCTIONALITY

Control Option Ordering Logic & Description		Control Option Functionality									Control Option Components	
		Networkable	Grouping	Scheduling	Occupancy/ Motion	Daylight Harvesting	0-10V Dimming	On/Off Control	Bluetooth App Programming	Sensor Height		
Independent	SCP_F	Sensor Control Programmable, 8F or 40F	-	-	-	✓	✓	✓	✓	-	8ft or 40ft	SCP_F
	ADD	AutoDIM Timer Based Dimming	-	-	✓	-	-	-	✓	-	-	ADD
	ADT	AutoDIM Time of Day Dimming	-	-	✓	-	-	-	✓	-	-	ADT
	7PR	7-Pin Receptacle	-	-	Paired with external control	-	Paired with external control	-	Paired with external control	-	-	7PR
	7PR-SC	7-Pin Receptacle with shorting cap	-	-	-	-	-	-	-	-		7PR-SC
	3PR	3-Pin twist lock	-	-	-	-	-	-	Paired with external control	-	-	3PR
	3PR-SC	3-Pin Receptacle with shorting cap	-	-	-	-	-	-	-	-		3PR-SC
	3PR-TL	3-Pin with photocontrol	-	-	-	-	✓	-	✓	-	-	

COVERAGE PATTERNS FOR SCP_F

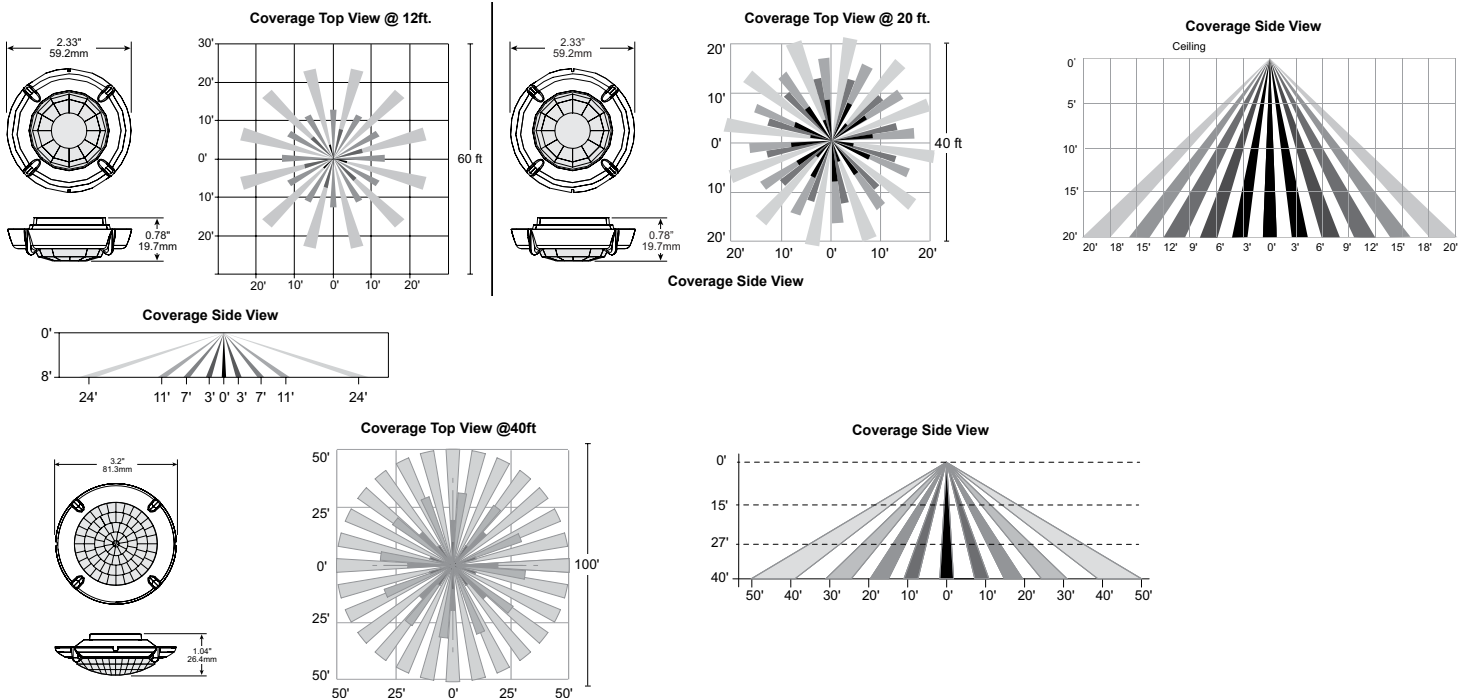

VIPER Area/Site

VIPER LUMINAIRE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

PROGRAMMED CONTROLS

ADD-AutoDim Timer Based Options

- Light delay options from 1-9 hours after the light is turned on to dim the light by 10-100%. To return the luminaire to its original light level there are dim return options from 1-9 hours after the light has been dimmed previously.

EX: ADD-6-5-R6

ADD Control Options	Configurations Choices	Example Choice Picked
Auto-Dim Options	1-9 Hours	6 - Delay 6 hours
Auto-Dim Brightness	10-100% Brightness	5 - Dim to 50% brightness
Auto-Dim Return	Delay 0-9 Hours	R6 - Return to full output after 6 hours

ADT-AutoDim Time of Day Based Option

- Light delay options from 1AM-9PM after the light is turned on to dim the light by 10-100%. To return the luminaire to its original light level there are dim return options from 1AM-9PM after the light has been dimmed previously.

EX: ADT-6-5-R6

ADD Control Options	Configurations Choices	Example Choice Picked
Auto-Dim Options	12-3 AM and 6-11 PM	6 - Dim at 6PM
Auto-Dim Brightness	10-100% Brightness	5 - Dim to 50%
Auto-Dim Return	12-6 AM and 9-11P	R6 - Return to full output at 6AM

ORDERING GUIDE

Auto Dim Code	Timer Base (ADD) Auto-Dim Options		Auto Dim Cod	Time of Day (ADT) Auto-Dim Options	Code	Auto-Dim Brightness	Code	Auto-Dim Return Options	Code	Auto-Dim Brightness
D1	Delay 1 hour	OR	T0	Delay Midnight	0	100% Brightness	R1	Delay 1 hour or 1 AM	0	100% Brightness
D2	Delay 2 hours		T1	Delay 1 AM	1	10% Brightness	R2	Delay 2 hours or 2 AM	1	10% Brightness
D3	Delay 3 hours		T2	Delay 2 AM	2	20% Brightness	R3	Delay 3 hours or 3 AM	2	20% Brightness
D4	Delay 4 hours		T3	Delay 3 AM	3	30% Brightness	R4	Delay 4 hours or 4 AM	3	30% Brightness
D5	Delay 5 hours		T4	Delay 10 PM	4	40% Brightness	R5	Delay 5 hours or 5 AM	4	40% Brightness
D6	Delay 6 hours		T5	Delay 11 PM	5	50% Brightness	R6	Delay 6 hours or 6 AM	5	50% Brightness
D7	Delay 7 hours		T6	Delay 6 PM	6	60% Brightness	R7	Delay 7 hours or 7 AM	6	60% Brightness
D8	Delay 8 hours		T7	Delay 7 PM	7	70% Brightness	R8	Delay 8 hours or 8 AM	7	70% Brightness
D9	Delay 9 hours		T8	Delay 8 PM	8	80% Brightness	R9	Delay 9 hours or 9 AM	8	80% Brightness
D0	Delay 0 hours		T9	Delay 9 PM	9	90% Brightness	R0	Delay 0 hours or 12 AM	9	90% Brightness

DELIVERED LUMENS

For delivered lumens, please see Lumens Data PDF on www.Currentlighting.com

PROJECTED LUMEN MAINTENANCE

Ambient Temp.	0	25,000	*TM-21-11 36,000	50,000	100,000	Calculated L ₇₀ (Hours)
25°C / 77°F	1.00	0.97	0.96	0.95	0.91	408,000
40°C / 104°F	0.99	0.96	0.95	0.94	0.89	356,000

LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF)

Ambient Temperature		Lumen Multiplier	Micro Strike Lumen Multiplier				Strike Lumen Multiplier				Silicone Strike Lumen Multiplier			
			CCT	70 CRI	80 CRI	90 CRI	CCT	70 CRI	80 CRI	90 CRI	CCT	70 CRI	80 CRI	90 CRI
0°C	32°F	1.03	2700K	—	0.841	—	2700K	0.9	0.81	0.62	2200K	0.811	-	-
10°C	50°F	1.01	3000K	0.977	0.861	0.647	3000K	0.933	0.853	0.659	2700K	0.906	0.774	-
20°C	68°F	1.00	3500K	—	0.900	—	3500K	0.959	0.894	0.711	3000K	0.943	0.868	-
25°C	77°F	1.00	4000K	1	0.926	0.699	4000K	1	0.9	0.732	3500K	-	0.868	-
30°C	86°F	0.99	5000K	1	0.937	0.791	5000K	1	0.9	0.732	4000K	1	0.906	-
40°C	104°F	0.98	AP-Amber Phosphor Converted Multiplier				Monochromatic Amber Multiplier				5000K	1	0.906	-
			Amber	0.710			Amber	See Amber Spec Sheet			5000K	1	0.9	0.732

VIPER Area/Site

VIPER LUMINAIRE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ELECTRICAL DATA: MICRO STRIKE

# OF LEDS	160						
NOMINAL WATTAGE	35	50	75	100	115	135	160
SYSTEM POWER (W)	34.9	50.5	72.1	97.2	111.9	132.2	157.8
INPUT VOLTAGE (V)	CURRENT (Amps)						
120	0.29	0.42	0.63	0.83	0.96	1.13	1.33
208	0.17	0.24	0.36	0.48	0.55	0.65	0.77
240	0.15	0.21	0.31	0.42	0.48	0.56	0.67
277	0.13	0.18	0.27	0.36	0.42	0.49	0.58
347	0.10	0.14	0.22	0.29	0.33	0.39	0.46
480	0.07	0.10	0.16	0.21	0.24	0.28	0.33

# OF LEDS	320						
NOMINAL WATTAGE	145	170	185	210	235	255	315
SYSTEM POWER (W)	150	166.8	185.7	216.2	240.9	261.5	312
INPUT VOLTAGE (V)	CURRENT (Amps)						
120	1.21	1.42	1.54	1.75	1.96	2.13	2.63
208	0.70	0.82	0.89	1.01	1.13	1.23	1.51
240	0.60	0.71	0.77	0.88	0.98	1.06	1.31
277	0.52	0.61	0.67	0.76	0.85	0.92	1.14
347	0.42	0.49	0.53	0.61	0.68	0.73	0.91
480	0.30	0.35	0.39	0.44	0.49	0.53	0.66

# OF LEDS	480					
NOMINAL WATTAGE	285	320	340	390	425	470
SYSTEM POWER (W)	286.2	316.7	338.4	392.2	423.2	468
INPUT VOLTAGE (V)	CURRENT (Amps)					
120	2.38	2.67	2.83	3.25	3.54	3.92
208	1.37	1.54	1.63	1.88	2.04	2.26
240	1.19	1.33	1.42	1.63	1.77	1.96
277	1.03	1.16	1.23	1.41	1.53	1.70
347	0.82	0.92	0.98	1.12	1.22	1.35
480	0.59	0.67	0.71	0.81	0.89	0.98

# OF LEDS	720				
NOMINAL WATTAGE	435	475	515	565	600
SYSTEM POWER (W)	429.3	475	519.1	565.2	599.9
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	3.63	3.96	4.29	4.71	5.00
208	2.09	2.28	2.48	2.72	2.88
240	1.81	1.98	2.15	2.35	2.50
277	1.57	1.71	1.86	2.04	2.17
347	1.25	1.37	1.48	1.63	1.73
480	0.91	0.99	1.07	1.18	1.25

VIPER Area/Site

VIPER LUMINAIRE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ELECTRICAL DATA: STRIKE

# OF LEDS	36				
NOMINAL WATTAGE	39	55	85	105	120
SYSTEM POWER (W)	39.6	56.8	83.6	108.2	120.9
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	0.33	0.46	0.71	0.88	0.96
208	0.19	0.26	0.41	0.50	0.55
240	0.16	0.23	0.35	0.44	0.48
277	0.14	0.20	0.31	0.38	0.42
347	0.11	0.16	0.24	0.30	0.33
480	0.08	0.11	0.18	0.22	0.24

# OF LEDS	72				
NOMINAL WATTAGE	115	145	180	210	240
SYSTEM POWER (W)	113.7	143.2	179.4	210.2	241.7
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	1.00	1.21	1.50	1.75	1.79
208	0.58	0.70	0.87	1.01	1.03
240	0.50	0.60	0.75	0.88	0.90
277	0.43	0.52	0.65	0.76	0.78
347	0.35	0.42	0.52	0.61	0.62
480	0.25	0.30	0.38	0.44	0.45

# OF LEDS	108				
NOMINAL WATTAGE	215	250	280	325	365
SYSTEM POWER (W)	214.8	250.8	278.3	324.7	362.6
INPUT VOLTAGE (V)	CURRENT (Amps)				
120	2.00	2.08	2.33	3.04	2.67
208	1.15	1.20	1.35	1.75	1.54
240	1.00	1.04	1.17	1.52	1.33
277	0.87	0.90	1.01	1.32	1.16
347	0.69	0.72	0.81	1.05	0.92
480	0.50	0.52	0.58	0.76	0.67

# OF LEDS	162					
NOMINAL WATTAGE	320	365	405	445	485	545
SYSTEM POWER (W)	322.1	362.6	403.6	445.1	487.1	543.9
INPUT VOLTAGE (V)	CURRENT (Amps)					
120	2.71	2.67	3.38	3.71	4.04	4.54
208	1.56	1.54	1.95	2.14	2.33	2.62
240	1.35	1.33	1.69	1.85	2.02	2.27
277	1.17	1.16	1.46	1.61	1.75	1.97
347	0.94	0.92	1.17	1.28	1.40	1.57
480	0.68	0.67	0.84	0.93	1.01	1.14

VIPER Area/Site

VIPER LUMINAIRE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ELECTRICAL DATA: SILICONE STRIKE

# OF LEDS	40								
NOMINAL WATTAGE (W)	35	55	65	80	100	120	140	170	195
SYSTEM POWER (W)	34.4	47.4	63.3	82.2	101.7	121.6	141.4	168.8	193.0
INPUT VOLTAGE (V)	CURRENT (A)								
120	0.29	0.40	0.53	0.69	0.85	1.01	1.18	1.41	1.61
208	0.17	0.23	0.30	0.40	0.49	0.58	0.68	0.81	0.93
240	0.14	0.20	0.26	0.34	0.42	0.51	0.59	0.70	0.80
277	0.12	0.17	0.23	0.30	0.37	0.44	0.51	0.61	0.70
347	0.10	0.14	0.18	0.24	0.29	0.35	0.41	0.49	0.56
480	0.07	0.10	0.13	0.17	0.21	0.25	0.29	0.35	0.40

# OF LEDS	80									
NOMINAL WATTAGE (W)	75	90	105	130	155	175	205	225	250	280
SYSTEM POWER (W)	74.0	87.0	105.3	131.9	153.5	175.4	203.4	226.1	249.0	281.0
INPUT VOLTAGE (V)	CURRENT (A)									
120	0.62	0.73	0.88	1.10	1.28	1.46	1.70	1.88	2.08	2.34
208	0.36	0.42	0.51	0.63	0.74	0.84	0.98	1.09	1.20	1.35
240	0.31	0.36	0.44	0.55	0.64	0.73	0.85	0.94	1.04	1.17
277	0.27	0.31	0.38	0.48	0.55	0.63	0.73	0.82	0.90	1.01
347	0.36	0.42	0.51	0.63	0.74	0.84	0.98	1.09	1.20	1.35
480	0.15	0.18	0.22	0.27	0.32	0.37	0.42	0.47	0.52	0.59

# OF LEDS	120									
NOMINAL WATTAGE (W)	190	205	230	265	295	320	355	380	420	
SYSTEM POWER (W)	189.8	206.0	230.3	263.2	296.5	322.0	356.3	382.3	421.6	
INPUT VOLTAGE (V)	CURRENT (A)									
120	1.58	1.72	1.92	2.19	2.47	2.68	2.97	3.19	3.51	
208	0.91	0.99	1.11	1.27	1.43	1.55	1.71	1.84	2.03	
240	0.79	0.86	0.96	1.10	1.24	1.34	1.48	1.59	1.76	
277	0.69	0.74	0.83	0.95	1.07	1.16	1.29	1.38	1.52	
347	0.55	0.59	0.66	0.76	0.85	0.93	1.03	1.10	1.21	
480	0.40	0.43	0.48	0.55	0.62	0.67	0.74	0.80	0.88	

# OF LEDS	180									
NOMINAL WATTAGE (W)	275	295	335	360	395	435	470	510	550	
SYSTEM POWER (W)	272.7	296.8	333.2	357.8	394.7	432.4	470.2	508.7	547.4	
INPUT VOLTAGE (V)	CURRENT (A)									
120	2.27	2.47	2.78	2.98	3.29	3.60	3.92	4.24	4.56	
208	1.31	1.43	1.60	1.72	1.90	2.08	2.26	2.45	2.63	
240	1.14	1.24	1.39	1.49	1.64	1.80	1.96	2.12	2.28	
277	0.98	1.07	1.20	1.29	1.42	1.56	1.70	1.84	1.98	
347	0.79	0.86	0.96	1.03	1.14	1.25	1.36	1.47	1.58	
480	0.57	0.62	0.69	0.75	0.82	0.90	0.98	1.06	1.14	


VIPER Area/Site

VIPER LUMINAIRE

MICRO STRIKE PHOTOMETRY


The following diagrams represent the general distribution options offered for this product. For detailed information on specific product configurations, see website photometric test reports.

Type 2




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 3




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 4 Wide




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 4F



Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 5QW



Mounting Height: 20 ft
Scale: 1 inch = 20 ft


VIPER Area/Site

VIPER LUMINAIRE

OPTIC STRIKE PHOTOMETRY


The following diagrams represent the general distribution options offered for this product. For detailed information on specific product configurations, see website photometric test reports.

Type FR – Front Row/Auto Optic




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 2




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 3




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 4 Forward




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 4 Wide




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 5QM




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 5RW (rectangular)




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 5W (round wide)




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type TC




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type Corner




Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 5QW



Mounting Height: 20 ft
Scale: 1 inch = 20 ft

Type 5QN



Mounting Height: 20 ft
Scale: 1 inch = 20 ft

VIPER Area/Site


VIPER LUMINAIRE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

SILICONE OPTIC STRIKE PHOTOMETRY


The following diagrams represent the general distribution options offered for this product. For detailed information on specific product configurations, see website photometric test reports.

Type 2




Mounting Height: 20 ft
Scale: 1 inch = 25 ft

Type 3




Mounting Height: 20 ft
Scale: 1 inch = 25 ft

Type 4 Forward




Mounting Height: 20 ft
Scale: 1 inch = 25 ft

Type 4 Wide




Mounting Height: 20 ft
Scale: 1 inch = 25 ft

Type 4WBC



Mounting Height: 20 ft
Scale: 1 inch = 25 ft

Type 4WMB




Mounting Height: 20 ft
Scale: 1 inch = 25 ft

Type 5QM



Mounting Height: 20 ft
Scale: 1 inch = 25 ft

Type 5QW



Mounting Height: 20 ft
Scale: 1 inch = 25 ft

Type LCC



Mounting Height: 20 ft
Scale: 1 inch = 25 ft

Type RCC



Mounting Height: 20 ft
Scale: 1 inch = 25 ft

VIPER Area/Site

VIPER LUMINAIRE



DATE: _____ LOCATION: _____

TYPE: _____ PROJECT: _____



CATALOG #: _____

DIMENSIONS



SIZE 1

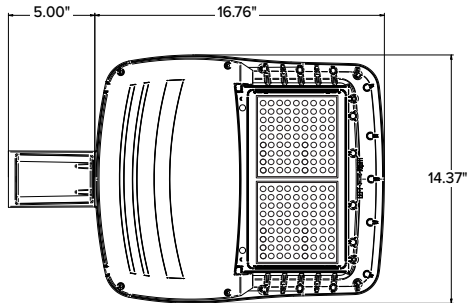



SIZE 2

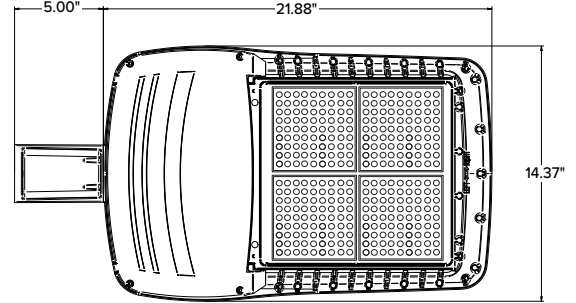

SIZE 3

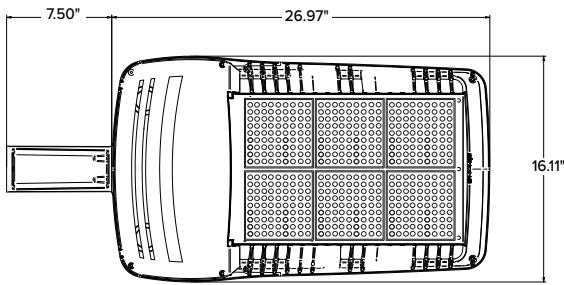

SIZE 4

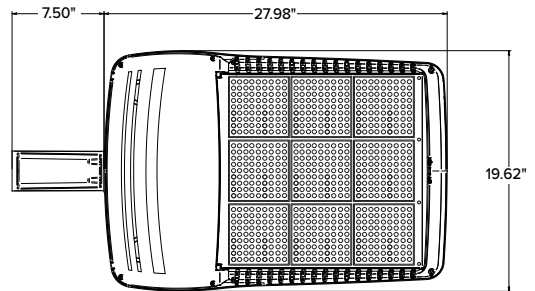

	EPA				Config.
	VP1 (Size 1)	VP2 (Size 2)	VP3 (Size 3)	VP4 (Size 4)	
Single Fixture	0.454	0.555	0.655	0.698	
Two at 180	0.908	1.110	1.310	1.396	
Two at 90	0.583	0.711	0.857	0.948	
Three at 90	1.037	1.266	1.512	1.646	
Three at 120	0.943	1.155	1.392	1.680	
Four at 90	1.166	1.422	1.714	1.896	


	Weight	
	lbs	kgs
VP1 (Size 1)	13.7	6.2
VP2 (Size 2)	16.0	7.26
VP3 (Size 3)	25.9	11.7
VP4 (Size 4)	30.8	13.9

VIPER Area/Site

VIPER LUMINAIRE



DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

MOUNTING




A-STRAIGHT ARM MOUNT

Fixture ships with integral arm for ease of installation. Compatible with Current Outdoor B3 drill pattern for ease of installation on square poles. For round poles add applicable suffix (2/3/4/5)

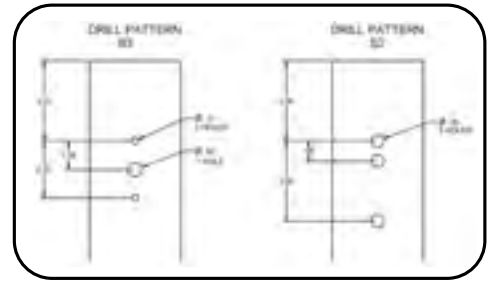


ASQU-UNIVERSAL ARM MOUNT

Universal mounting block for ease of installation. Compatible with drill patterns from 1.5" to 5.25" and Current drill pattern S2. For round poles add applicable suffix (2/3/4/5)




AAU-ADJUSTABLE ARM FOR POLE MOUNTING

Rotatable arm mounts directly to pole. Compatible with drill patterns from 1.5" to 5.25" and Current drill pattern S2 and B3. For round poles add applicable suffix (2/3/4/5). Rotatable in 5° aiming angle increments. Micro Strike configurations have a 45° aiming limitation. Strike configurations have a 30° aiming limitation.

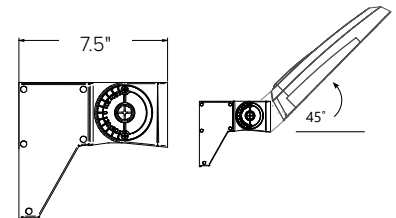


ADU-DECORATIVE UPSWEPT ARM

Upswept Arm compatible with drill patterns from 1.5" to 5.25" and Current drill pattern S2. For round poles add applicable suffix (2/3/4/5).




MAF-MAST ARM FITTER

Fits 2-3/8" OD horizontal tenons.




K-KNUCKLE

Rotatable in 5-degree aiming angle increments, fits 2-3/8" tenons or pipes. Micro Strike configurations have a 45° aiming limitation. Strike configurations have a 30° aiming limitation.




T-TRUNNION

Trunnion for surface and crossarm mounting using (1) 3/4" or (2) 1/2" size through bolts. Micro Strike configurations have a 45° aiming limitation. Strike configurations have a 30° aiming limitation.

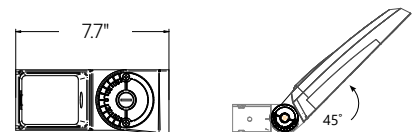

WM-WALL MOUNT

Compatible with universal arm mount, adjustable arm mount, and decorative arm mount. The WA option uses the same wall bracket but replaces the decorative arm with an adjustable arm.



VIPER Area/Site

VIPER LUMINAIRE


ADDITIONAL INFORMATION (CONTINUED)

HOUSE SIDE SHIELD FIELD INSTALL ACCESSORIES


HSS has a depth of 5" for all Viper sizes

Not to be used with Occupancy Sensors as the shield may block the light to the sensor.


VPR2x HSS-90-B-xx




VPR2x HSS-270-BSS-xx




VPR2x HSS-360-xx




VPR2x HSS-90-F-xx




VPR2x HSS-270-FSS-xx




VPR2x HSS-90-S-xx



VPR2x HSS-270-FSB-xx



VPR2x HSS-90-S-xx



VPR2x HSS-270-FSB-xx

