

ROOTS: 32"

0-11" TOPSOIL

MOTTLES: 62"

RESTRICTIVE: 62"

10"-19" R/B SL

MOTTLES: 57"

ROOTS:

GW: NONE OBSERVED

RESTRICTIVE: 57"

8"-27" OBFSL

ROOTS: 32"

LEDGE: NONE OBSERVED

GW: 78"

ROOTS: 41"

RESTRICTIVE: 40"

TEST HOLE #25 DEPTH: 80"

46"-80" L/G MEDIUM SAND W/GRAVEL AND

19"-60" L/B FINE SAND LOAMY COMPACT

CÓBBLES SATURATED

11"-46" RED BROWN FSL

LEDGE: NONE OBSERVED

TEST HOLE #26 DEPTH: 60"

SÁTURATED

TEST HOLE #27 DEPTH: 58"

27"-58" L/B FINE SILTY SAND

MOTTLES: NONE OBSERVED

TEST HOLE #28 DEPTH: 77"

MOTTLES: NONE OBSERVED

LEDGE: NONE OBSERVED

TEST HOLE #29 DEPTH: 96"

MOTTLES: NONE OBSERVED

LEDGE: NONE OBSERVED

TEST HOLE #30 DEPTH: 70"

AND COBBLES

TEST HOLE #31 DEPTH: 52"

MOTTLES: NONE OBSERVED

TEST HOLE #32 DEPTH: 51"

MOTTLES: NONE OBSERVED

TEST HOLE #33 DEPTH: 48"

-COMPACT

36"-48" LIGHT TAN FINE SAND SILTY

9"-36" L/B FSL-COMPACT

MOTTLES: NONE OBSERVED

GW: NONE OBSERVED

RESTRICTIVE: 48"

LEDGE: NONE OBSERVED ROOTS: 38"

GW: NONE OBSERVED

LEDGE: NONE OBSERVED

33"-51" L/G FINE SAND FRIABLE

GW: NONE OBSERVED

RESTRICTIVE: 52"

0-5" TS/LM 5"-33" L/B FSL

ROOTS: 34"

RESTRICTIVE: 51"

ROOTS: 46"

LEDGE: NONE OBSERVED

0-8" TS/LL 8"-30" R/B FINE SANDY LOAM SILTY

30"-52" Y/B FINE SAND SILTY W/PEBBLES

MOTTLES: NONE OBSERVED

LEDGE: NONE OBSERVED

GW: NONE OBSERVED

RESTRICTIVE: 70"

ROOTS: 34"

GW: NONE OBSERVED

RESTRICTIVE: 96"

GW: NONE OBSERVED

39"-77" L/G MEDIUM SAND W/GRAVEL

24"-45" Y/B MEDIUM SAND W/PEBBLES

45"-96" L/G FINE TO MEDIUM SAND W/GRAVEL

8"-21" R/B FINE SANDY LOAM W/PEBBLES

21"-70" L/G FINE TO MEDIUM SAND W/GRAVEL

LEDGE: NONE OBSERVED

GW: NONE OBSERVED

RESTRICTIVE: 58"

15"-39" OBFSL

ROOTS: 32"

RESTRICTIVE: 58"

0-12" TS 12"-24" OBFSL

939 LONG COVE ROAD TOWN OF LEDYARD SUBDIVISION SOIL TESTING 24 LOTS DATES 9/25/2024, 9/26/2024, 9/30/2024, 10/2/2024 AND 10/4/2024 FORM COMPLETED BY: ODALYS REYES MORALES OTHER PRESENT FOR SITE INVESTIGATION: WILLIAM SCHMIDT REPRESENTATIVE FROM LLHD ODALYS REYES MORALES, DANIEL HOLMES, LUPITA VARELA, BRIGID WHITE AND IDELYS AMADOR.

TEST HOLE #5 DEPTH: 68" 0-8" TOPSOIL/LEAF LITTER 8-26" LIGHT BROWN FINE SANDY LOAM-MOTTLED 26-50" Y/B FINE SILTY SAND 50-68" TAN MEDIUM SAND W/PEBBLES AND MOTTLES: 24" GW: NONE OBSERVED LEDGE: 68" ROOTS:

TEST HOLE #6 DEPTH: 92" 7"-38" Y/B VERY FINE SILTY SAND 38"-92" LIGHT BROWN MEDIUM SAND W/COBBLES AND PEBBLES-MOTTLED THROUGH

MOTTLES: 42" GW: NONE OBSERVED LEDGE: ROOTS: RESTRICTIVE: 42"

RESTRICTIVE: 24"

TEST HOLE #7 DEPTH: 102" 8"-32" 0/B FINE SILTY SAND 32"-48" TAN FINE SILTY SAND 48"-102" TAN MEDIUM SAND W/COBBLES

MOTTLES: 27" GW: NONE OBSERVED LEDGE: 102" RESTRICTIVE: 27"

TEST HOLE #8 DEPTH: 50" 12"-22" BROWN FINE SANDY LOAM 22-50" Y/B FINE TO MEDIUM SAND W/ GRAVEL AND COBBLES

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 50" RESTRICTIVE: 50"

TEST HOLE #9 DEPTH: 58" 0"-10" T/S 10"-24" OBFSL 24"-58" L/G SAND AND GRAVEL W/COBBLES

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 50" ROOTS: 22" RESTRICTIVE: 58"

TEST HOLE #10 DEPTH: 57" 12"-40" OBFSL W/PEBBLES-SILTY 40"-57" L/B FINE SAND W/COBBLES

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: ROOTS: 22" RESTRICTIVE: 57"

TEST HOLE #11 DEPTH: 58" 6"-22" OB VERY FINE SANDY LOAM-SILTY 22"-45" L/B VERY FINE SAND 45"-58" L/B FINE SAND W/PEBBLES

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 58" ROOTS: 32" RESTRICTIVE: 58"

TEST HOLE #12 DEPTH: 48"

14"-30" OBFSL-SILTY 30-48" LIGHT GREY FINE TO MEDIUM SAND W/COBBLES AND PEBBLES MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 48"

RESTRICTIVE: 48" TEST HOLE #13 DEPTH: 54" 0-7" T/S 7"-26" OBFSL

ROOTS: 25"

LEDGE: 54"

RESTRICTIVE: 54"

26"-54" L/B FINE SILTY SAND MOTTLES: NONE OBSERVED GW: NONE OBSERVED

TEST HOLE #14 DEPTH: 56" 0-8" T/S 8"-30" OBFSL

30"-56" LIGHT GREY FINE SILTY SAND W/MOTTLES MOTTLES: 28" GW: NONE OBSERVED

LEDGE: 56" RESTRICTIVE: 28"

943 LONG COVE ROAD

1:00

1:05

1 · 10

1:15

1:20

1:25

1:30

PERC BETWEEN PITS 9 & 11

PERC RATE: 2 MINS./INCH

9.5"

16.75"

18.5"

TEST HOLE #15 DEPTH: 58" 10"-44" OBFSL

44"-58" L/B FINE SILTY SAND MOTTLES: 39" GW: NONE OBSERVED

TEST HOLE #15 DEPTH: 58" 0-10" T/S " 10"-44" OBFSL 44"-58" L/B FINE SILTY SAND

MOTTLES: 39" GW: NONE OBSERVED LEDGE: 58" ROOTS: 37" RESTRICTIVE: 39"

LEDGE: 58"

RESTRICTIVE: 39"

ROOTS: 37"

TEST HOLE #16 DEPTH: 89" 0-10" T/S " 10"-31" OBFSL-SILTY 31"-89" LIGHT GREY FINE TO MEDIUM FRIABLE W/GRAVEL AND COBBLES STRATIFIED

MOTTLES: NONE OBSERVED GW: NONE OBSERVED RESTRICTIVE: 89"

TEST HOLE #17 DEPTH: 96" 0-8" T/S 8"-37" LBFSL 37"-96" LIGHT GREY STRATIFIED FINE TO MEDIUM W/GRAVEL

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 96" RESTRICTIVE: 96"

LEDGE: 82"

LEDGE: 70"

ROOTS: 36"

RESTRICTIVE: 70"

RESTRICTIVE: 26"

TEST HOLE #18 DEPTH: 82" 0-10" T/S " 10"-28" OBFSL-MOTTLED 28"-48" L/B FINE SAND SILTY 48"-82" LIGHT GRAY MED TO COARSE SAND AND GRAVEL W/COBBLES AND PEBBLES-FRIABLE GW: NONE OBSERVED

TEST HOLE #19 DEPTH: 70" 0-11" T/S 11"-26" OBFSL /"-41" LB FINE SAND 41"-70" LIGHT GREY FINE TO MEDIUM SAND W/ GRAVEL 20% W/BOULDERS AND COBBLES MOTTLES: NONE OBSERVED GW: NONE OBSERVED

TEST HOLE #20 DEPTH: 67" 0-12" TOPSOIL 26"-67" L/B FINE SILTY SAND COMPACT

MOTTLES: 30" GW: NONE OBSERVED LEDGE: NONE OBSERVED RESTRICTIVE: 30"

TEST HOLE #21 DEPTH: 60" 0-13" TOPSOIL 13"-36" OBFSL-SILTY 36"-60" L/B FINE SILTY SAND W/COBBLES

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: NONE OBSERVED RESTRICTIVE: 60"

TEST HOLE #22 DEPTH: 48" 0-8" TOPSOIL 8"-28" OBFSL-SILTY 28"-48" Y/B SILTY VERY FINE SAND COMPACT

MOTTLES: 42" GW: NONE OBSERVED LEDGE: NONE OBSERVED RESTRICTIVE: 42"

TEST HOLE #23 DEPTH: 68" -42" OBFSL-SILTY 42"-68" L/G MEDIUM SAND W/GRAVEL

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: NONE OBSERVED RESTRICTIVE: 68"

TEST HOLE #24 DEPTH: 64" TEST HOLE #34 DEPTH: 72" 0-8" TS 8"-20" R/B FSL-COMPACT 15"-40" L/B FINE SANDY LOAM COMPACT 40"-52" MOTTLING LAYER ORANGE FINE SAND SILTY 20"-38" Y/B FINE SAND 52"-64" BROWN FINE TO MEDIUM SAND W/COBBLES 38"-72" L/G FINE SAND SILTY AND PEBBLES MOTTLES: 40" MOTTLES: NONE OBSERVED GW: NONE OBSERVED GW: NONE OBSERVED LEDGE: 54" LEDGE: NONE OBSERVED

> TEST HOLE #35 DEPTH: 48" 8"-30" BROWN FSL-COMPACT SILTY 30"-48" LIGHT BROWN FINE SILTY SAND

RESTRICTIVE: 72"

RESTRICTIVE: 48"

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 48" ROOTS:

TEST HOLE #36 DEPTH: 61" 0-12" T/S " 12"-34" OBFSL 34-61" Y/B VERY FINE SILTY SAND

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: NONE OBSERVED RESTRICTIVE: 61"

TEST HOLE #37 DEPTH: 49" 0-5" T/S 5"-26" OBFSL-SILTY 26"-49" Y/B FINE SANDY LOAM

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 49" ROOTS: 32" RESTRICTIVE: 49"


TEST HOLE #38 DEPTH: 50" 0-10" T/S " 10"-32" R/B FSL 32"-50" L/B FINE SAND


MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 50" ROOTS: RESTRICTIVE: 50" TEST HOLE #39 DEPTH: 49" 0-18" FILL " 18"-21" BURIED TOPSOIL 21-34" OBFSL 34-41" LIGHT GREY FINE SAND W/20% GRAVEL MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 49" ROOTS: 34"

TEST HOLE #40 DEPTH: 60" 0-12" FILL 12"-33" R/S FSL 33"-60" Y/B MED SAND AND GRAVEL

RESTRICTIVE: 49"

MOTTLES: NONE OBSERVED GW: NONE OBSERVED LEDGE: 60" ROOTS: 32" RESTRICTIVE: 60"

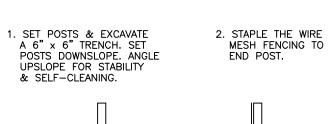

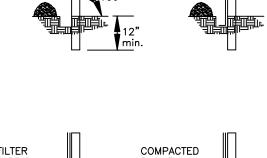


3. ATTACH FILTER FABRIC TO THE WIRE FENCING & EXTEND IT INTO THE TRENCH.


4. BACKFILL THE TRENCH EXCAVATED SOIL.

FILTER FABRIC SEDIMENT BARRIER NOT TO SCALE


DEEP & THE WIDTE OF A STRAW BALE

1. EXCAVATE A TRENCH 4"





BETWEEN BALES TO CREATE A CONTINUOUS



CONSTRUCTION OF A STRAW BALE BARRIER NOT TO SCALE

SANITARY DESIGN CRITERIA:

- A. ALL PRIMARY AND SEPTIC SYSTEM DESIGNS ARE DESIGNED FOR THREE-BEDROOM HOMES. NO TUBS OVER 100 GALLONS IN SIZE OR GARBAGE DISPOSAL INTO SEPTIC SYSTEM PLANNED.
- B. THREE BEDROOM HOMES AT A PERC RATE OF 10.0 MIN/INCH OR LESS REQUIRES 495 S.F. OF EFFECTIVE LEACHING AREA.
- C. GEOMATRIX GST 6212 LEACHING SYSTEM SELECTED FOR LEACHING SYSTEM DESIGN.
- GEOMATRIX GST 6212 SYSTEM PROVIDES 10 Sq. Ft. EFFECTIVE LEACHING PER L.F.
- HF = HYDRAULIC FACTOR BASED ON GRADIENT AND DEPTH TO RESTRICTION
- FF = FLOW FACTOR, 1.5 FOR THREE BEDROOM HOME DESIGN
- PF = PERC FACTOR, 1.0 FOR PERC RATE UP TO & 10.0 MIN/INCH

MLSS TABLE (NOT APPLICABLE)						
STREET ADDRESS	GRADIENT %	RESTRICTION	HF	FF	PF	SYSTEM
943 LONG COVE ROAD	MLSS	NOT	APPLICABLE	1.5	1.0	50' L.F. GST 6212
963 LONG COVE ROAD	MLSS	NOT	APPLICABLE	1.5	1.0	50' L.F. GST 6212

## EROSION & SEDIMENT CONTROL PLAN

SHALL BE IN ACCORDANCE WITH THE STATE OF CONNECTICUT GUIDELINES FOR EROSION AND SEDIMENT CONTROL DATED MARCH 24, 2024. NARRATIVE:

## PURPOSE AND DESCRIPTION OF PROJECT:

THE PURPOSE OF THIS PROJECT IS TO SUBDIVIDE 48.55 ACRES OF LAND TO CREATE 3 RESIDENTIAL BUILDING LOTS. (ONE WITH

ROBERT HOHLFELDER 860-705-9299 (OR OWNER AT TIME OF CONSTRUCTION) SHALL BE RESPONSIBLE FOR OVERSEEING THE INSTALLATION AND PROPER MAINTENANCE OF ANY EROSION & SEDIMENT CONTROL MEASURES EMPLOYED IN IMPLEMENTING

TOTAL AREA OF THE PROJECT SITE AND THE TOTAL AREA OF THE SITE THAT IS EXPECTED TO BE DISTURBED BY CONSTRUCTION ACTIVITIES.

EXISTING HOME) EACH LOT WILL BE SERVICED BY ON SITE WELL AND SEPTIC SYSTEM.

ESTIMATE OF TOTAL AREA TO BE DISTURBED APPROXIMATELY 1.0± ACRES FOR HOME/DRIVE AND SEPTIC CONSTRUCTION.

PLANNED START AND COMPLETION DATES FOR THE PROJECT. IT IS ANTICIPATED THAT THE PROJECT WILL COMMENCE DURING WINTER OF 2025/2026 AND BE COMPLETED IN THE SUMMER OF 2026.

LEAST WEEKLY AND AFTER EACH RAINFALL OF 0.5 INCH IN A 24 HOUR PERIOD.

DESIGN CRITERIA, CONSTRUCTION DETAILS AND MAINTENANCE PROGRAM FOR THE EROSION & SEDIMENT CONTROL MEASURES TO BE USED SILT FENCE, HAY BALES OR WOODCHIPS WILL BE USED. ALL SEDIMENT BARRIERS SHALL BE MAINTAINED SUCH THAT SEDIMENTS WILL BE REMOVED WHEN REACHING A HEIGHT OF 0.5 FEET. BREACHES IN BARRIERS SHALL BE REPAIRED IMMEDIATELY. THE BARRIERS SHALL BE INSPECTED AT

CONSTRUCTION ENTRANCE DESIGN AND MAINTENANCE CRITERIA FROM 2024 CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL, ENTRANCE. THE CONSTRUCTION ENTRANCES WILL BE CONSTRUCTED OF ANGULAR STONE IN A SIZE AND GRADATION CORRESPONDING TO ASTM C-33, SIZE NO. 2 OR 3, OR DOT STANDARD SPECIFICATIONS SECTION M.01.01 SIZE #3. THE CONSTRUCTION ENTRANCE WILL BE 12 FEET WIDE AND 50 FEET LONG.

CONSTRUCTION: CONSTRUCTION ENTRANCE AREAS WILL BE CLEARED AND GRUBBED. AREAS WILL THEN BE ROUGH GRADED. A 4-INCH LAYER OF CRUSHED STONE WILL BE SPREAD AS DEPICTED IN THE DETAILS.

MAINTENANCE: CONSTRUCTION ENTRANCES WILL BE MAINTAINED IN A CONDITION THAT WILL MITIGATE TRACKING AND WASHING OF SEDIMENT ONTO PAVED SURFACES. THE CONSTRUCTION ENTRANCE WILL BE TOP DRESSED AS NEEDED TO PROVIDE FUNCTIONALITY. ADDITIONAL LENGTH MAY BE ADDED IF ON-SITE CONDITIONS WARRANT SUCH EXTENSION. ANY ACCUMULATED OR SPILLED SEDIMENTS WILL BE CLEANED IMMEDIATELY, AND DISPOSED OF IN A MANNER WHICH IS CONSISTENT WITH THE INTENT OF THIS EROSION & SEDIMENT CONTROL PLAN.

STOCKPILE MANAGEMENT WILL BE DONE IN ACCORDANCE WITH THE 2024 CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL (CHAPTER 4). TOPSOIL STOCKPILES WILL BE LOCATED AS DEPICTED ON THE PLANS, AND WILL BE TREATED AS DISTURBED GROUND, I.E.: SURROUNDED BY SILT FENCE, AND SEEDED TO GRASS AFTER ALL THE TOPSOIL TO BE STRIPPED IS PLACED IN THE STOCKPILE. STOCKPILE SLOPES SHALL NOT EXCEED 2:1.

TOPSOILING SHALL TAKE PLACE AS AREAS ARE BROUGHT TO GRADE. THE TOPSOIL THAT SHALL BE SPREAD IS OF NATURAL ORIGIN AND WILL BE TAKEN FROM THE TOPSOIL STOCKPILE(S) REFERRED TO ABOVE. STONES LARGER THAN 2 INCHES IN DIAMETER AND OTHER DEBRIS WILL BE REMOVED FROM THE TOPSOIL WITH A RAKE. TOPSOIL SHALL BE SPREAD AT A MINIMUM DEPTH OF 4 INCHES OVER ALL DISTURBED AREAS. IN ORDER TO "BOND" THE TOPSOIL TO THE SUBSOIL, THE SUBGRADE WILL BE LOOSENED BY "TRACKING" WITH A BULLDOZER IMMEDIATELY BEFORE APPLYING TOPSOIL. TOPSOIL WILL NOT BE PLACED IF THE SUBGRADE OR THE TOPSOIL IS FROZEN OR TOO WET. HEAVY RUBBER-TIRED VEHICLES WILL BE EXCLUDED FROM THE NEWLY TOPSOILED AREAS TO PREVENT EXCESSIVE COMPACTION WHICH COULD HINDER SEED GERMINATION AND SEEDLING GROWTH.


PERMANENT SEEDING WILL BE DONE AS DISTURBED AREAS ARE BROUGHT TO GRADE AND TOPSOILED AS LONG AS SUCH SEEDING IS DONE BETWEEN APRIL 1 AND JULY OR AUGUST 15 THROUGH OCTOBER 31. WITHIN 7 DAYS AFTER TOPSOIL IS APPLIED THE APPROPRIATE SEED MIX WILL BE BROADCAST AT THE PRESCRIBED RATE FOR THAT PARTICULAR MIX. THE SELECTED SEED MIX WILL BE FROM THE 2024 CONNECTICUT GUIDELINES FOR EROSION AND SEDIMENT CONTROL, FIGURE PS-3. PRIOR TO SEEDING, FERTILIZER WILL BE APPLIED AT THE RATE OF 7.5 PER 1,000 SQUARE FEET (10-10-10 OR EQUIVALENT), AND GROUND LIMESTONE WILL BE APPLIED AT THE RATE OF 200 POUNDS PER 1,000 SQUARE FEET. THE LIME AND FERTILIZER WILL BE LIGHTLY WORKED TO A DEPTH OF 3 TO 4 INCHES. SEED SHALL BE APPLIED UNIFORMLY USING A CYCLONE SEEDER (HYDROSEEDING MAY BE USED IN LIEU OF CONVENTIONAL SEEDING METHODS.) HAY MULCH WILL BE APPLIED AT THE RATE OF 100 POUNDS (APPROXIMATELY 2 BALES) PER 1,000 SQUARE FEET. WHERE SLOPES EXCEED 10 PERCENT. JUTE NETTING SHALL BE USED TO ANCHOR THE HAY MULCH IN PLACE. ANY SUCH NETTING WILL BE INSTALLED TO MANUFACTURER'S RECOMMENDATIONS.

MAINTENANCE: THE SEEDBED WILL BE INSPECTED AT LEAST ONCE PER WEEK, AND WITHIN 24 HOURS OF A RAINFALL IN AN AMOUNT EXCEEDING 0.5 INCHES IN 24 HOURS. IN ANY AREAS THAT SUSTAIN DAMAGE. THE TOPSOIL WILL BE REAPPLIED AND SMOOTHED, AND RESEEDED AS DESCRIBED ABOVE. THE NEWLY ESTABLISHED GRASS WILL NOT BE MOWN UNTIL IT REACHES A HEIGHT OF 6 INCHES. MOWING WILL NOT TAKE PLACE WHEN THE GROUND SURFACE IS WET. THE FIRST MOWING WILL TAKE 33 TO 50 PERCENT OF THE GRASS HEIGHT (I.E.: NOT BELOW 3 INCHES). MULCH MATERIALS WILL NOT BE REMOVED, BUT WILL BE ALLOWED TO DISINTEGRATE OVER TIME.


WHERE BARE GROUND NEEDS TO BE PROTECTED FOR RELATIVELY SHORT PERIODS, OR WHERE THE SEEDING SEASONS FOR PERMANENT SEEDINGS CAN NOT BE ADHERED TO, TEMPORARY SEEDING MAY BE USED. THE RECOMMENDED SEED MIX WILL VARY UPON CIRCUMSTANCES, BUT SHALL BE IN COMPLIANCE WITH THE 2002 CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL, FIGURE TS-2, TEMPORARY SEEDING RATES AND DATES. WHERE THE SEASON PRECLUDES ANY TYPE OF SEEDING, AN ANCHORED MULCH WILL BE EMPLOYED TO PROTECT BARE SOIL AREAS.


TRUCTION SEQUENCE. PRIOR TO THE COMMENCEMENT OF ANY EARTH DISTURBANCES, THE DEVELOPER AND HIS CONTRACTOR SHALL MEET WITH TOWN STAFF FOR A PRECONSTRUCTION CONFERENCE.

- 1) INSTALL CONSTRUCTION ENTRANCE AS SHOWN ON PLAN.
- 2) INSTALL EROSION AND SEDIMENT CONTROL.
- 3) STRIP TOPSOIL ACCORDING TO THE PLAN. SEED STRIPPED AREAS THAT ARE NOT TO BE WORKED FOR 30 DAYS IMMEDIATELY WITH PERENNIAL RYEGRASS AT THE RATE OF 40 LBS./ACRE.
- 4) APPLY TOPSOIL AND PERMANENT SEED MIX AND APPLY AND ANCHOR MULCH TO ALL FINISHED SLOPES.
- 5) REMOVE SEDIMENT BARRIERS AFTER TOPSOIL STABILIZED. DISPOSAL OF SEDIMENTS - ANY SEDIMENT REMOVED FROM ANY EROSION AND SEDIMENT CONTROL MEASURE AS PART OF SITE MAINTENANCE SHALL BE DISPOSED OF IN A MANNER CONSISTENT WITH THE INTENT OF THIS PLAN. NO SEDIMENT SHALL BE DEPOSITED IN ANY WETLAND AREA.

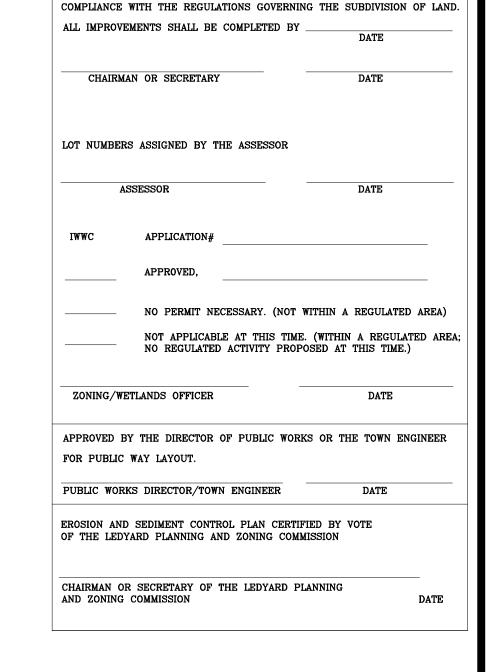

APPROVED BY THE LEDYARD PLANNING AND ZONING COMMISSION AS TO TH

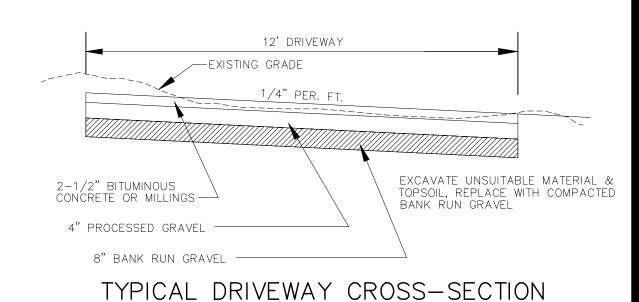

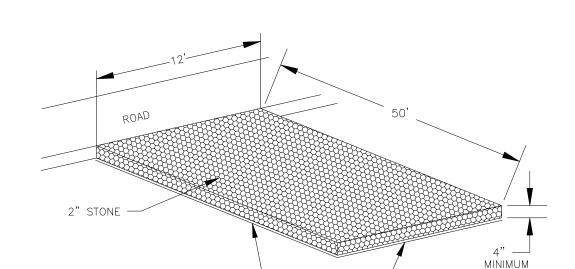

TEMPORARY CONSTRUCTION ENTRANCE FOR HOMES NOT TO SCALE

- FILTER FABRIC

DEEP TEST PIT DATA, PERCOLATION DATA, EROSION AND SEDIMENT CONTROL NARRATIVE AND DETAILS  $\mathbf{AND}$ 

SEPTIC SYSTEM DESIGN CRITERIA KINEO ESTATES SUBDIVISION

> PREPARED FOR MT. KINEO BUILDERS

JOHN HALE ALMY II  $\mathbf{AND}$ 


PROPERTY OF

MARCY ZWERLING ALMY 939 LONG COVE ROAD LEDYARD, CONNECTICUT

SEPTEMBER 2025

SHEET 4 OF 4

THICKNESS

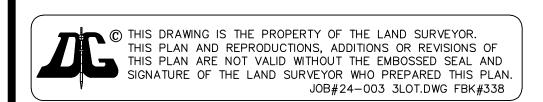

PERCOLATION TESTING PRESOAK 1 TO 2 HOURS BEFORE PERCOLATION TEST

1: 54

1:59

2:04

2:09

2:14

963 LONG COVE ROAD

PERC BETWEEN PITS 29 & 30

10.5"

14.5"

18.25"

DRY

PERC RATE: 7 MINS./INCH



EMAIL: DIETER.GARDNER@YAHOO.COM