




1 EAST ELEVATION
SCALE: 1/8" = 1'-0"

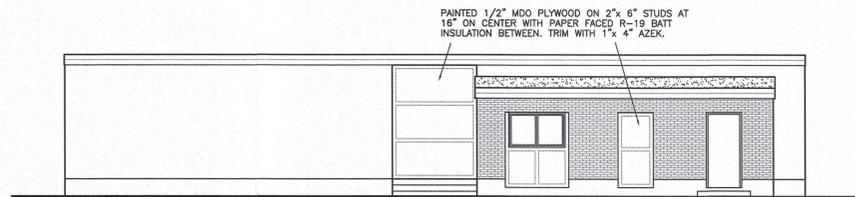


2 SOUTH ELEVATION
SCALE: 1/8" = 1'-0"

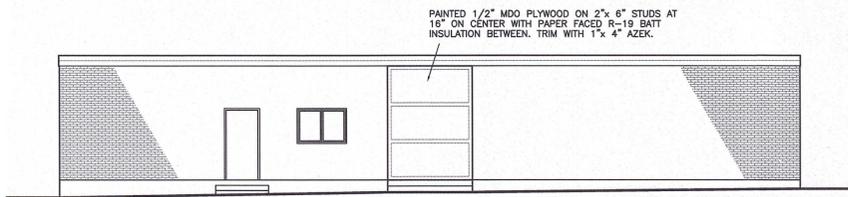

3 NORTH ELEVATION
SCALE: 1/8" = 1'-0"

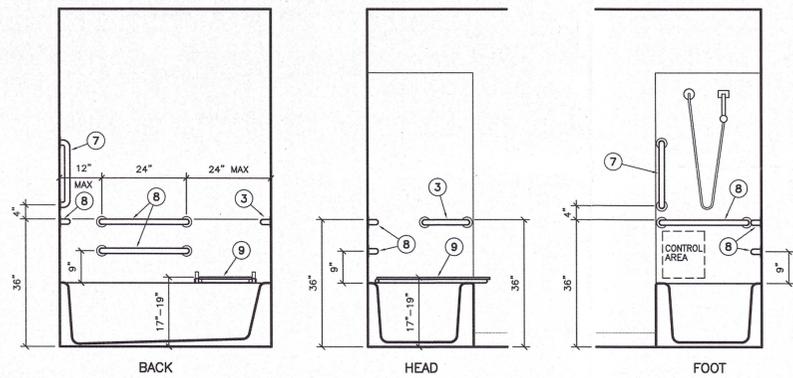


4 HANDICAP BATHROOM ELEVATIONS
SCALE: 1/2" = 1'-0"

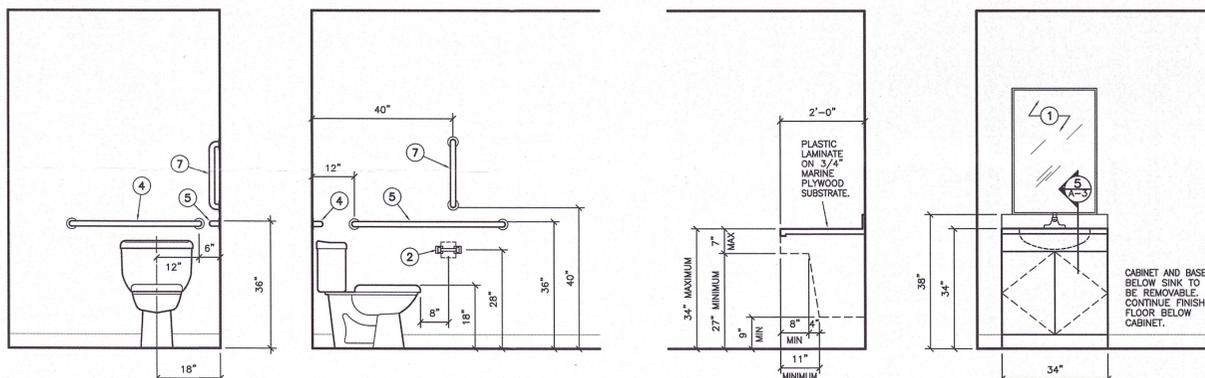


5 HANDICAP LAVATORY SECTION/ELEVATION
SCALE: 1/2" = 1'-0"

TOILET ACCESSORY SCHEDULE				
MARK	ITEM	MANUFACTURER	MODEL NO.	REMARKS
1	MIRROR	BOBRICK	B165-2436	24" x 36" SELECT FLOAT GLASS MIRROR. MOUNT LOWER EDGE 38" ABOVE FINISHED FLOOR. MIRROR TO BE NO. 1 QUALITY, 1/4" SELECT FLOAT GLASS. SELECTED FOR SILVERING, ELECTROLYTICALLY COPPER-PLATED BY THE GALVANIC PROCESS AND GUARANTEED FOR 15 YEARS IN BRIGHT POLISHED STAINLESS STEEL CHANNEL FRAME.
2	TISSUE DISPENSER SINGLE ROLL	BOBRICK	B-6857	DISPENSER OF 18-8S, TYPE 304 STAINLESS STEEL, SATIN FINISH, 22 GAUGE FLANGES AND SUPPORT ARMS, 16 GAUGE CONCEALED WALL PLATES, SPINDLE OF CHROME-PLATED PLASTIC EQUIPPED WITH HEAVY-DUTY INTERNAL SPRING.
3	12" GRAB BAR	BOBRICK	B680x12	12" LONG x 1-1/2" DIAMETER. TOP OF BAR AT 36" AFF. STAINLESS STEEL, SATIN FINISH, CONCEALED MOUNTING.
4	36" GRAB BAR	BOBRICK	B680x36	36" LONG x 1-1/2" DIAMETER. TOP OF BAR AT 36" AFF. STAINLESS STEEL, SATIN FINISH, CONCEALED MOUNTING.
5	42" GRAB BAR	BOBRICK	B680x42	42" LONG x 1-1/2" DIAMETER. TOP OF BAR AT 36" AFF. STAINLESS STEEL, SATIN FINISH, CONCEALED MOUNTING.
6	NOT USED	-	-	-
7	18" GRAB BAR	BOBRICK	B-6068x18	18" LONG x 1-1/2" DIAMETER. REFER TO ELEVATIONS FOR LOCATION. STAINLESS STEEL, SATIN FINISH, CONCEALED MOUNTING.
8	24" GRAB BAR	BOBRICK	B680x24	24" LONG x 1-1/2" DIAMETER. TOP OF BAR AT 36" AFF. UNO. STAINLESS STEEL, SATIN FINISH, CONCEALED MOUNTING.
9	FOLDING TUB SEAT	ELOOMA	70-PH3201	1" DIAMETER, 18 GAUGE, TYPE 304 STAINLESS STEEL TUBING WITH #4 SATIN FINISH. SOLID PHENOLIC SEAT, 1/2" THICK. SEAT SHALL SWING UP AND BE SECURED AT THE WALL WITH A STAINLESS STEEL HOOK. RUBBER SLEEVES SHALL PROTECT THE TUB IN THE "DOWN" POSITION. SEAT COLOR TO BE WHITE.

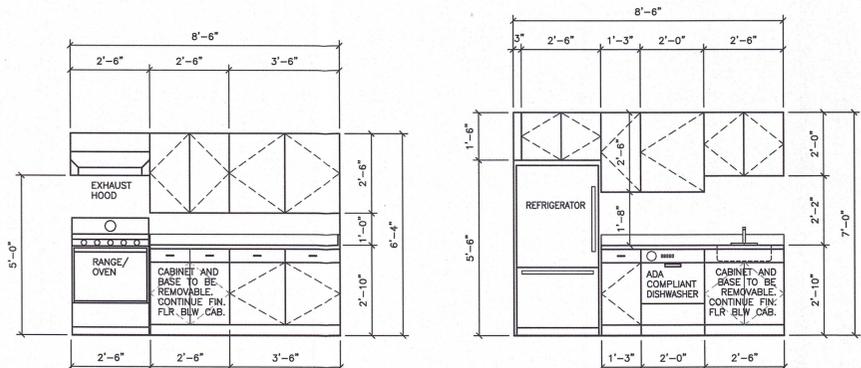


7 UNIT 2 KITCHEN ELEVATIONS HANDICAP ADAPTABLE
SCALE: 3/8" = 1'-0"



6 HANDICAP UNIT BATHROOM PLAN
SCALE: 1/4" = 1'-0"

NOTE:
PROVIDE GRAB BARS AND NECESSARY BLOCKING. GRAB BARS ARE TO BE MOUNTED WITH SUFFICIENT STRENGTH TO WITHSTAND STRESSES IN BENDING, SHEAR AND TENSION WHEN A VERTICAL OR HORIZONTAL FORCE OF 250 LBS IS APPLIED AT ANY POINT ON THE GRAB BAR.
ALL GRAB BARS ARE TO BE 1-1/2" OUTSIDE DIAMETER, OF 18 GAUGE TYPE 304 STAINLESS STEEL WITH A NUMBER 4 SATIN FINISH. ALL SCREWS ARE TO BE CONCEALED.
LAVATORY PIPES SHALL BE INSULATED WITH INSULATING KIT OF SOFT, NON-YELLOWING, FLAME RETARDANT VINYL. ANGLE STOPS SHALL BE FULLY INSULATED AND ALLOW FOR EMERGENCY SHUTOFF. INTERNAL RIBS SHALL PROVIDE AIR GAP BETWEEN PIPE AND COVER PROVIDING INSULATION AND CUSHION AGAINST CONTACT. COLOR TO BE WHITE.

RECEIVED
JUL 07 2023
LAND USE DEPARTMENT



DAVID ELIAS, AIA
ARCHITECT
311 ALEXANDER ROAD
NEW BRITAIN, CT 06053
(860) 224-6971

LEDYARD CENTER SCHOOL
740 COLONEL LEDYARD HIGHWAY
LEDYARD, CONNECTICUT

JANUARY 12, 2022

A-3
OF 3